

ISO 9001 CERTIFIED COMPANY

ALEUM 300PSI BRONZE BUTTERFLY VALVE SCREWED BSP ENDS

FEATURES

- Factory Installed Supervisory Tamper Switch Assembly
- Included Switch is For Indoor and Outdoor Use
- UL Listed
- FM Approved

OPTIONS

• Available in 175 or 300 psi

TECHNICAL DATA


- Code: VGBBBHP-(size OD)-GEAR
- Size Range: DN25 65
- Max. Working Temp.: 120°C
- Max. Working Pressure: 300 psi

MATERIAL

Part Name	Material	
Body	ASTM B-505	
Disc	ASTM B-584 EPDM Encapsulated	
Stem	ASTM A-564 Type XM 12	
Gear Housing Cover	ASTM A-619	
Hand Wheel	ASTM A-619	
Flag indicator	ASTM B-16	

DIMENSIONS

Size	Α	В	С	D	E
DN	(mm)	(mm)	(mm)	(mm)	(mm)
25	43.0	39.7	54.0	52.0	37.0
32	54.0	49.0	67.0	56.0	41.0
40	60.0	56.0	73.0	59.0	61.3
50	76.0	70.0	82.4	64.0	49.0
65	90.0	84.0	104.0	69.5	54.5

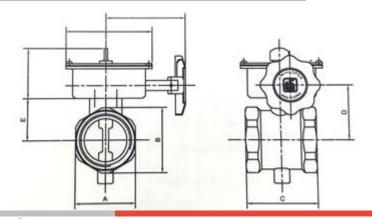



Page 1 Revised: 23/05/2023 11:07:25 AM

COM.au Y:\REFIRE\CATALOGUE\Datasheets\TOOLS\ROLL GROOVE\VALVES\Butterfly\Aleum Br Screwed BFV.docx The data provided here is for information purposes only. Refire reserves the right to change or modify this data without prior notice.



ALEUMTECH MODEL# HBT