

STAINLESS STEEL Y STRAINERS

BRASS Y STRAINER

FEATURES

- Brass Body
- Mesh: Stainless Steel 304
- Thread: BSPF AS1722.2


TECHNICAL DATA

- Code: V(size)BS
- Size Range: DN15-DN100
- Max Working Temp.: 100°C
- Cold Working Press.: 1600 kPa



DIMENSIONS

Size (DN)	L	H	Mesh Diameter	Mesh Centre to Centre	Approx. Wgt (kg)
15	65	34	0.8	1	0.23
20	80	42	0.8	1	0.35
25	96	48	0.8	1	0.59
32	104	55	0.8	1	0.83
40	116	66	0.8	1	1.19
50	140	74	0.8	1	1.95
65	168	85	0.8	1	2.38

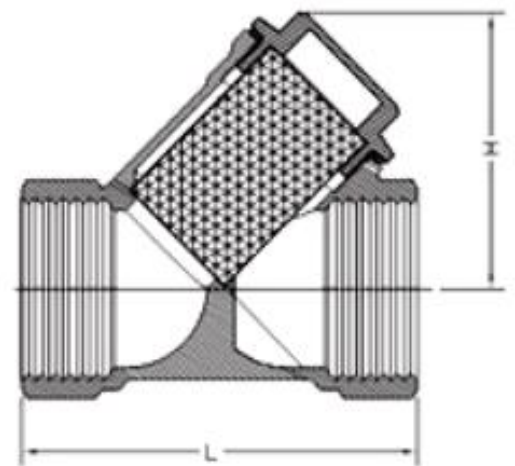

Please note: Larger Sizes Are Available on Request

STAINLESS STEEL 316 BSP Y-STRAINERS

FEATURES


- Stainless Steel 316, BSP
- Can Be Installed in Horizontal or Vertical Position
- Suitable For Liquid, Gas or Steam
- Used in Applications Where Small Amounts of Solids Need to be Removed and Frequent Cleaning is not Required
- Design Standard ASME B16.34

TECHNICAL DATA

- Code: V(size DN)SS
- Size Range: DN8 – DN50
- Design Standard: ASME B16.34
- Cold Working Pressure: 5500 kPa
- Temp. Range: -20°C - 80°C
- Mesh Size: #14 (1.41mm)

MATERIAL LISTING

NO.	PART NAME	MATERIAL
1	Body	CF8/CF8M
2	Filter	SS316
3	Joint Gasket	PTFE
4	Cap	CF8/CF8M

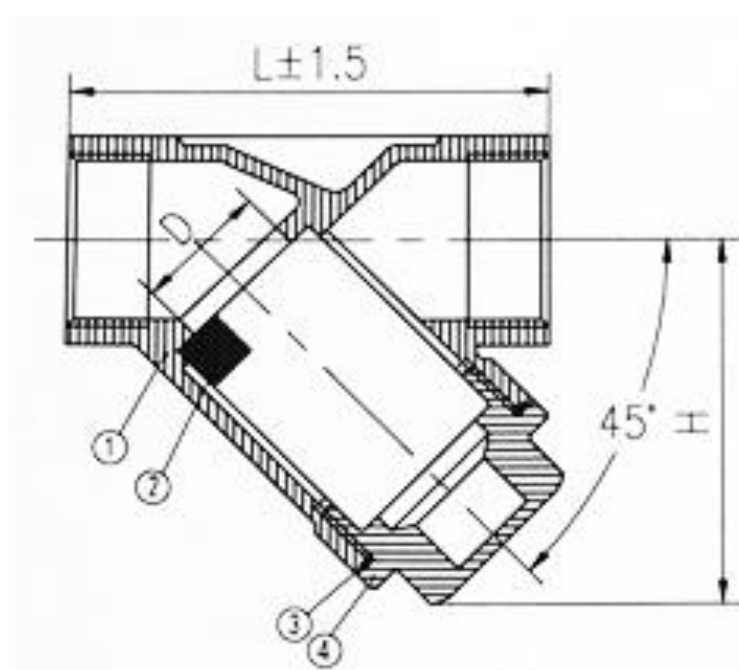

DIMENSIONS

Size DN	8	10	15	20	25	32	40	50
L ± 1.5	54	54	59	73	84	97	106	127
H	35	35	45	60	63	80	88	109
Wgt (kg)	0.135	0.120	0.155	0.275	0.355	0.550	0.730	1.235