

TWIN HEAD HYDRANT RISER

FEATURES

- DN150 Galv. Pipe Size
- Bull Head Tee 100 x 80 x 80
- Two Hydrant Valves (Nominate Fire Brigade Connection)
- Table D or Table E Flanged Base as standard
- Height as nominated
- Steel or Stainless Steel

OPTIONS

- Storz Adaptors & Caps
- Brass or Plastic Hydrant Valve Caps
- Tapped Bullhead Tee for Pressure Gauge (Gauge sold separately)
- Painted Red
- Size DN150
- Other connections to the main– Flange, CU/RG Adaptor or Roll Groove
- Other Sizes (Tapped, 35 Deg Offset Style; Rear or Bottom, BI Angle Style, Extra Check Valve)


TECHNICAL DATA

- Code: FFS-THHR- Size (DN100 Or 150) -(Fire Brigade Connection Storz)
- Height: Requirement to AUS Standard AS2419
Min. Height Above FGL: 750mm
Max. Height Above FGL: 1200mm
Stock Height = 1300mm (other lengths available)



Standard

Tapped

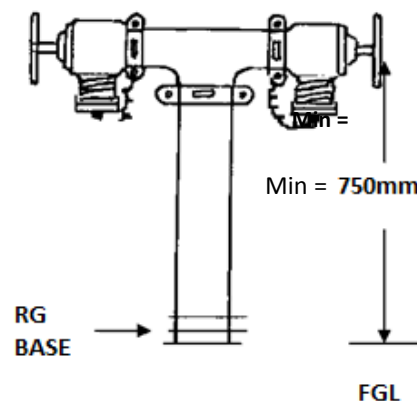

Vertical

 35 Degree Offset
Bottom Entry

 35 Degree Offset
Rear Entry

Stainless Steel

C/W Check Valve