

PUMP START UNIT

FEATURES

- All brass and stainless components
- Pressure switch
- 100mm face liquid filled gauge
- Lockable stainless steel ball valves
- Easy access for electrical connections
- 100% pressure tested
- Inlet and outlet connections are DN15 (1/2") female
- Meets AS 2118.1 AS 2419.1 and AS 2941


OPTIONS

- We can assemble to your specifications.
- Assembly on a mounting board is also available.

TECHNICAL

- Code: FFS-PSUS

DIMENSIONS

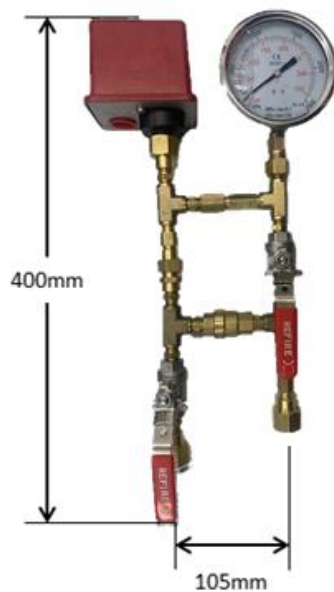

Complete with mounting board

FFS-PSUS

We can assemble to your requirements